



MELEE V2 DI2 BATTERY INSTALLATION



REQUIRED PARTS:

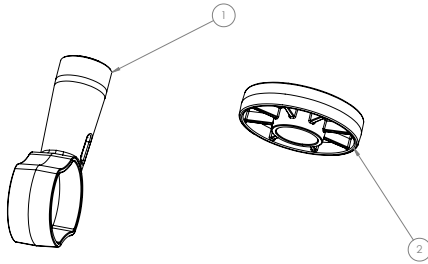

ITEM #	PART NUMBER	DESCRIPTION	QTY.
1	100-5008-025	Di2 Battery Retainer - Lower - Melee v2	1
2		Di2 Battery Retainer - Upper - Melee v2	1





- ① Squish the upper retainer into the downtube through the access hole or bottom bracket.

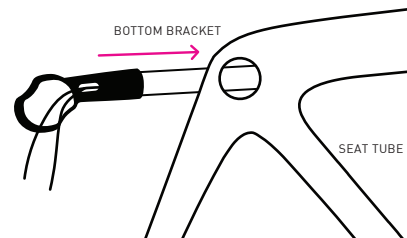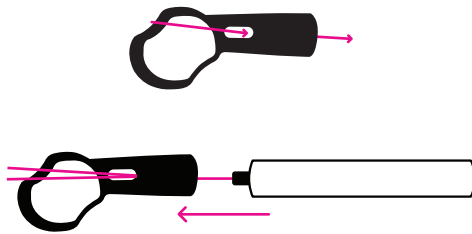

- ② Insert the E-tube through the lower retainer opening. Plug the E-tube into the battery and press the battery into the lower retainer.

- ③ Connect the battery to the upper retainer through the access hole.

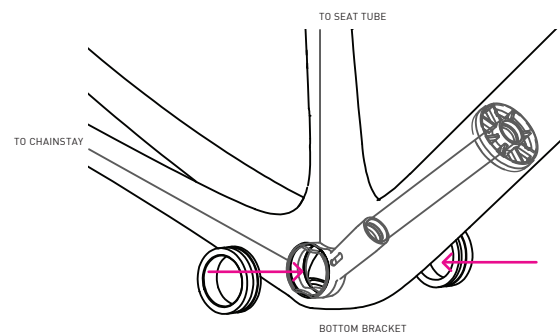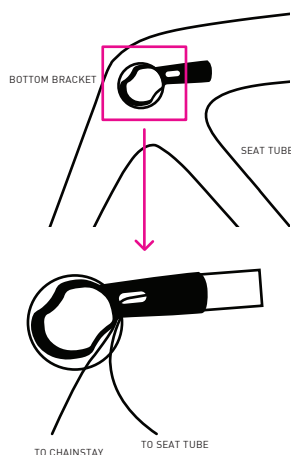

- ④ Push the completed assembly into the downtube until the round section of the lower retainer is in line with the bottom bracket.

- ⑤ Push the bottom bracket shell through the round section of the lower retainer to secure the assembly.